



# YE Series 82E Deadbolt

### Standard Specifications:


<b>Door Prep</b>	Cross bore: 2-1/8" Edge Bore: 1" Latch face: 1" x 2-1/4" RC
<b>Door Thickness</b>	1-3/8" to 1-3/4" doors
<b>Latch Std product</b>	Tubular 2-3/8" or 2-3/4" RC/SC adjustable Tubular Drive-in latch available
<b>Strike</b>	1" x 2-1/4" Radius Corner Deadbolt Strike
<b>Door Handing</b>	Non Handed
<b>Cylinder</b>	5 Pin KW-1 Compatible Optional SC-1
<b>Keying</b>	KA5 std; other options available

### Features

Meets or exceeds Grade 3 s

- Std latch/strike screw is co wood/metal screw

### Dimensions:

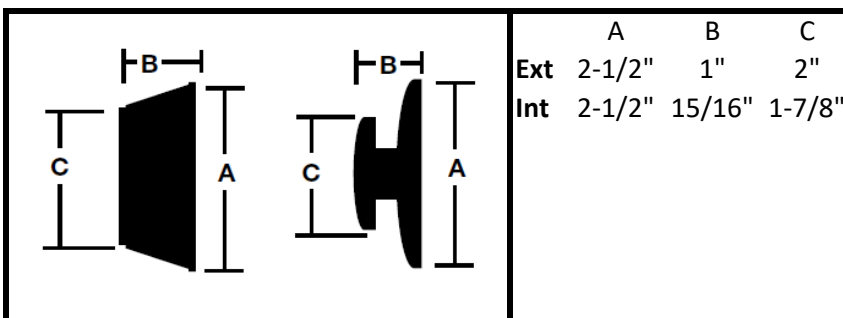

Model	Function	CTN QTY	ItemNumber	
			10BP	Available finishes:
82E	Sgl Cylinder	30	EDSC10BP6	10BP
			EDSC10BP5SC	619/ 15
				626/ 26D
				630 / 32D
				605 / 3

Not all finishe  
SC-1 keyway -

tandards  
mbination



s available  
Check av:

OY